

A2 ballasts for power reduction for HS lamps

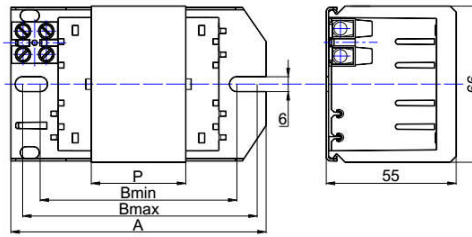


Figure 1

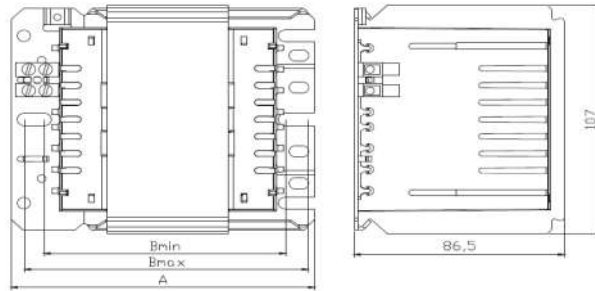


Figure 2

Core Cross-Section: 55 x 66 mm
86.5 x 107 mm

Vacuum impregnated with polyester resin

Screw terminals: 1,5 – 4 mm²

tw 130°C

Protection class 1

EN 60923, EN 61347 CE

Made in Slovenia (EU)

Lamp			Ballast													Cap.
Power	Type	Current	Type	Ord. No.	Voltage	Fig.	A	Bmin	Bmax	P	Weight	Δt	TS ^{*1}	EEL	Cp	
W		A			V at 50Hz		mm	mm	mm	mm	kg	K			μF ±10%	
100/100R	HS	1.2/1.0	SIR 530-100/70	8962	230	1	125	100	118	64	1.9	60	-	A2	16	
100/100R	HS	1.2/1.0	SIR 530-100/70 TS	9085	230	1	125	100	118	64	1.9	60	Yes	A2	16	
150/150R	HS	1.8/1.45	SIR 530-150/100 TS	12365	230	1	120	180	155	172	3.4	50	Yes	A2	20	
250/250R	HS	3.0/2.5	SIBR 530-250/150 TS	12364	230	2	150	120	137	70	5.1	55	Yes	A2	32	
400/400R	HS	4.45/2.4	SIBR 530-400/250	10877	230	2	150	120	137	70	5.1	75	-	A2	45	
400/400R	HS	4.45/2.4	SIBR 530-400/250 TS	10901	230	2	150	120	137	70	5.1	75	Yes	A2	45	

Note:

Other versions available on request.

*1 TS – Thermal protection