

Control gear unit (pulse version) series KIT for LEC lamps

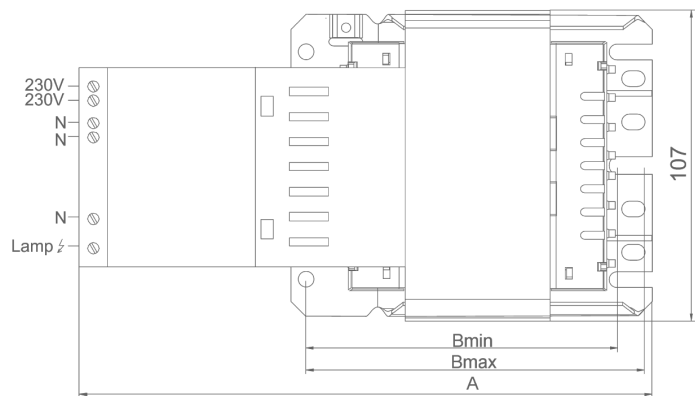


Figure 1

Shape: 86,5x107 mm

Built-in ballast with pulse tapping, pulse ignitor and compensation capacitor.

As individual components no longer need to be wired,
there is a significant reduction in assembly time and costs

tw 130

Push-in terminals: 0.75 – 2.5 mm²

Lamp distance <200mm

EN 61347, EN 60923

Lamp			Control gear								System		
Type	Output	Current	Type	No.	Figure	A	Bmin	Bmax	Δt	Weight	Mains current	Start current	Power factor
	W	A				mm	mm	mm	K	Kg	A	A	
230V, 50Hz													
LEC (HI)	315	3,15	SB-KIT 530-315 LEC	12491	1	218	131	140	50	5.5	1,6	max. 2,3	>0.90